Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

U.S. TOYO FAN CORP.
4915 Walnut Grove Ave., San Gabriel, CA 91776
(626) 287-5297
E-mail: sales@ustoyofan.com
FAX (626) 287-7350
www.ustoyofan.com

USTF6030 Series AC / Ball Bearing Fans

USTF 6030Series
Size: 2.36 in sq. x 1.18 in. thk
(60mm sq. x 30mm thk.)
Airflow: 11 CFM
Acoustical Noise: 29 dB (A)

MATERIAL: Frame - Aluminum Alloy, Painted Black Finish
Bearings - Sealed Ball
Impeller - UL94V-0 Plastic

WEIGHT: 5.0 oz. (140g)

TERMINATION: Lead wires standard

OPERATION TEMPERATURE: -40^0 to +70^0 C

INSULATION RESISTANCE: 100,000 Ohms min @ 500 VDC

DIELECTRIC STRENGTH: 500 VAC for 1 min.

INSULATION: Class A

SAFTEY: Impedance Protected

SAFTEY APPROVALS: UL No. E1065227, CSA No. 073720, VDE No. 16599

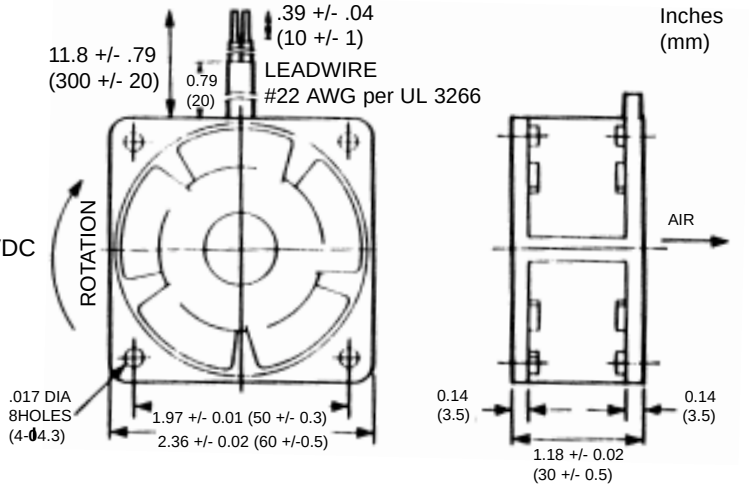

PERFORMANCE CURVES: (Obtained with test chamber and methods in accordance with AMCA Std. 210-74)

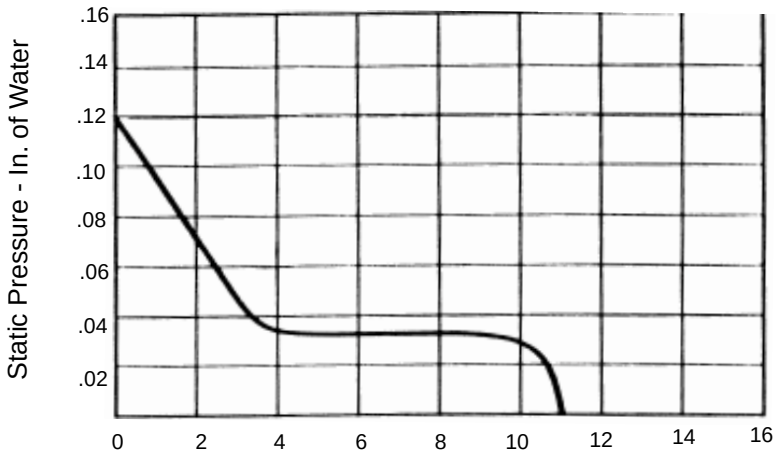

SPECIFICATIONS: (Based on 60 Hz Frequency)

PART NUMBER	VOLTS	WATTS	mAMPS	RPM	NOISE dB (A) @ 1M	CFM
USTF60301153W	115	4.0	44	3000	29	11

NOTE: Standard models with Terminals. Lead Wires available on request.